


# INZY Cube

## 1. Product appearance

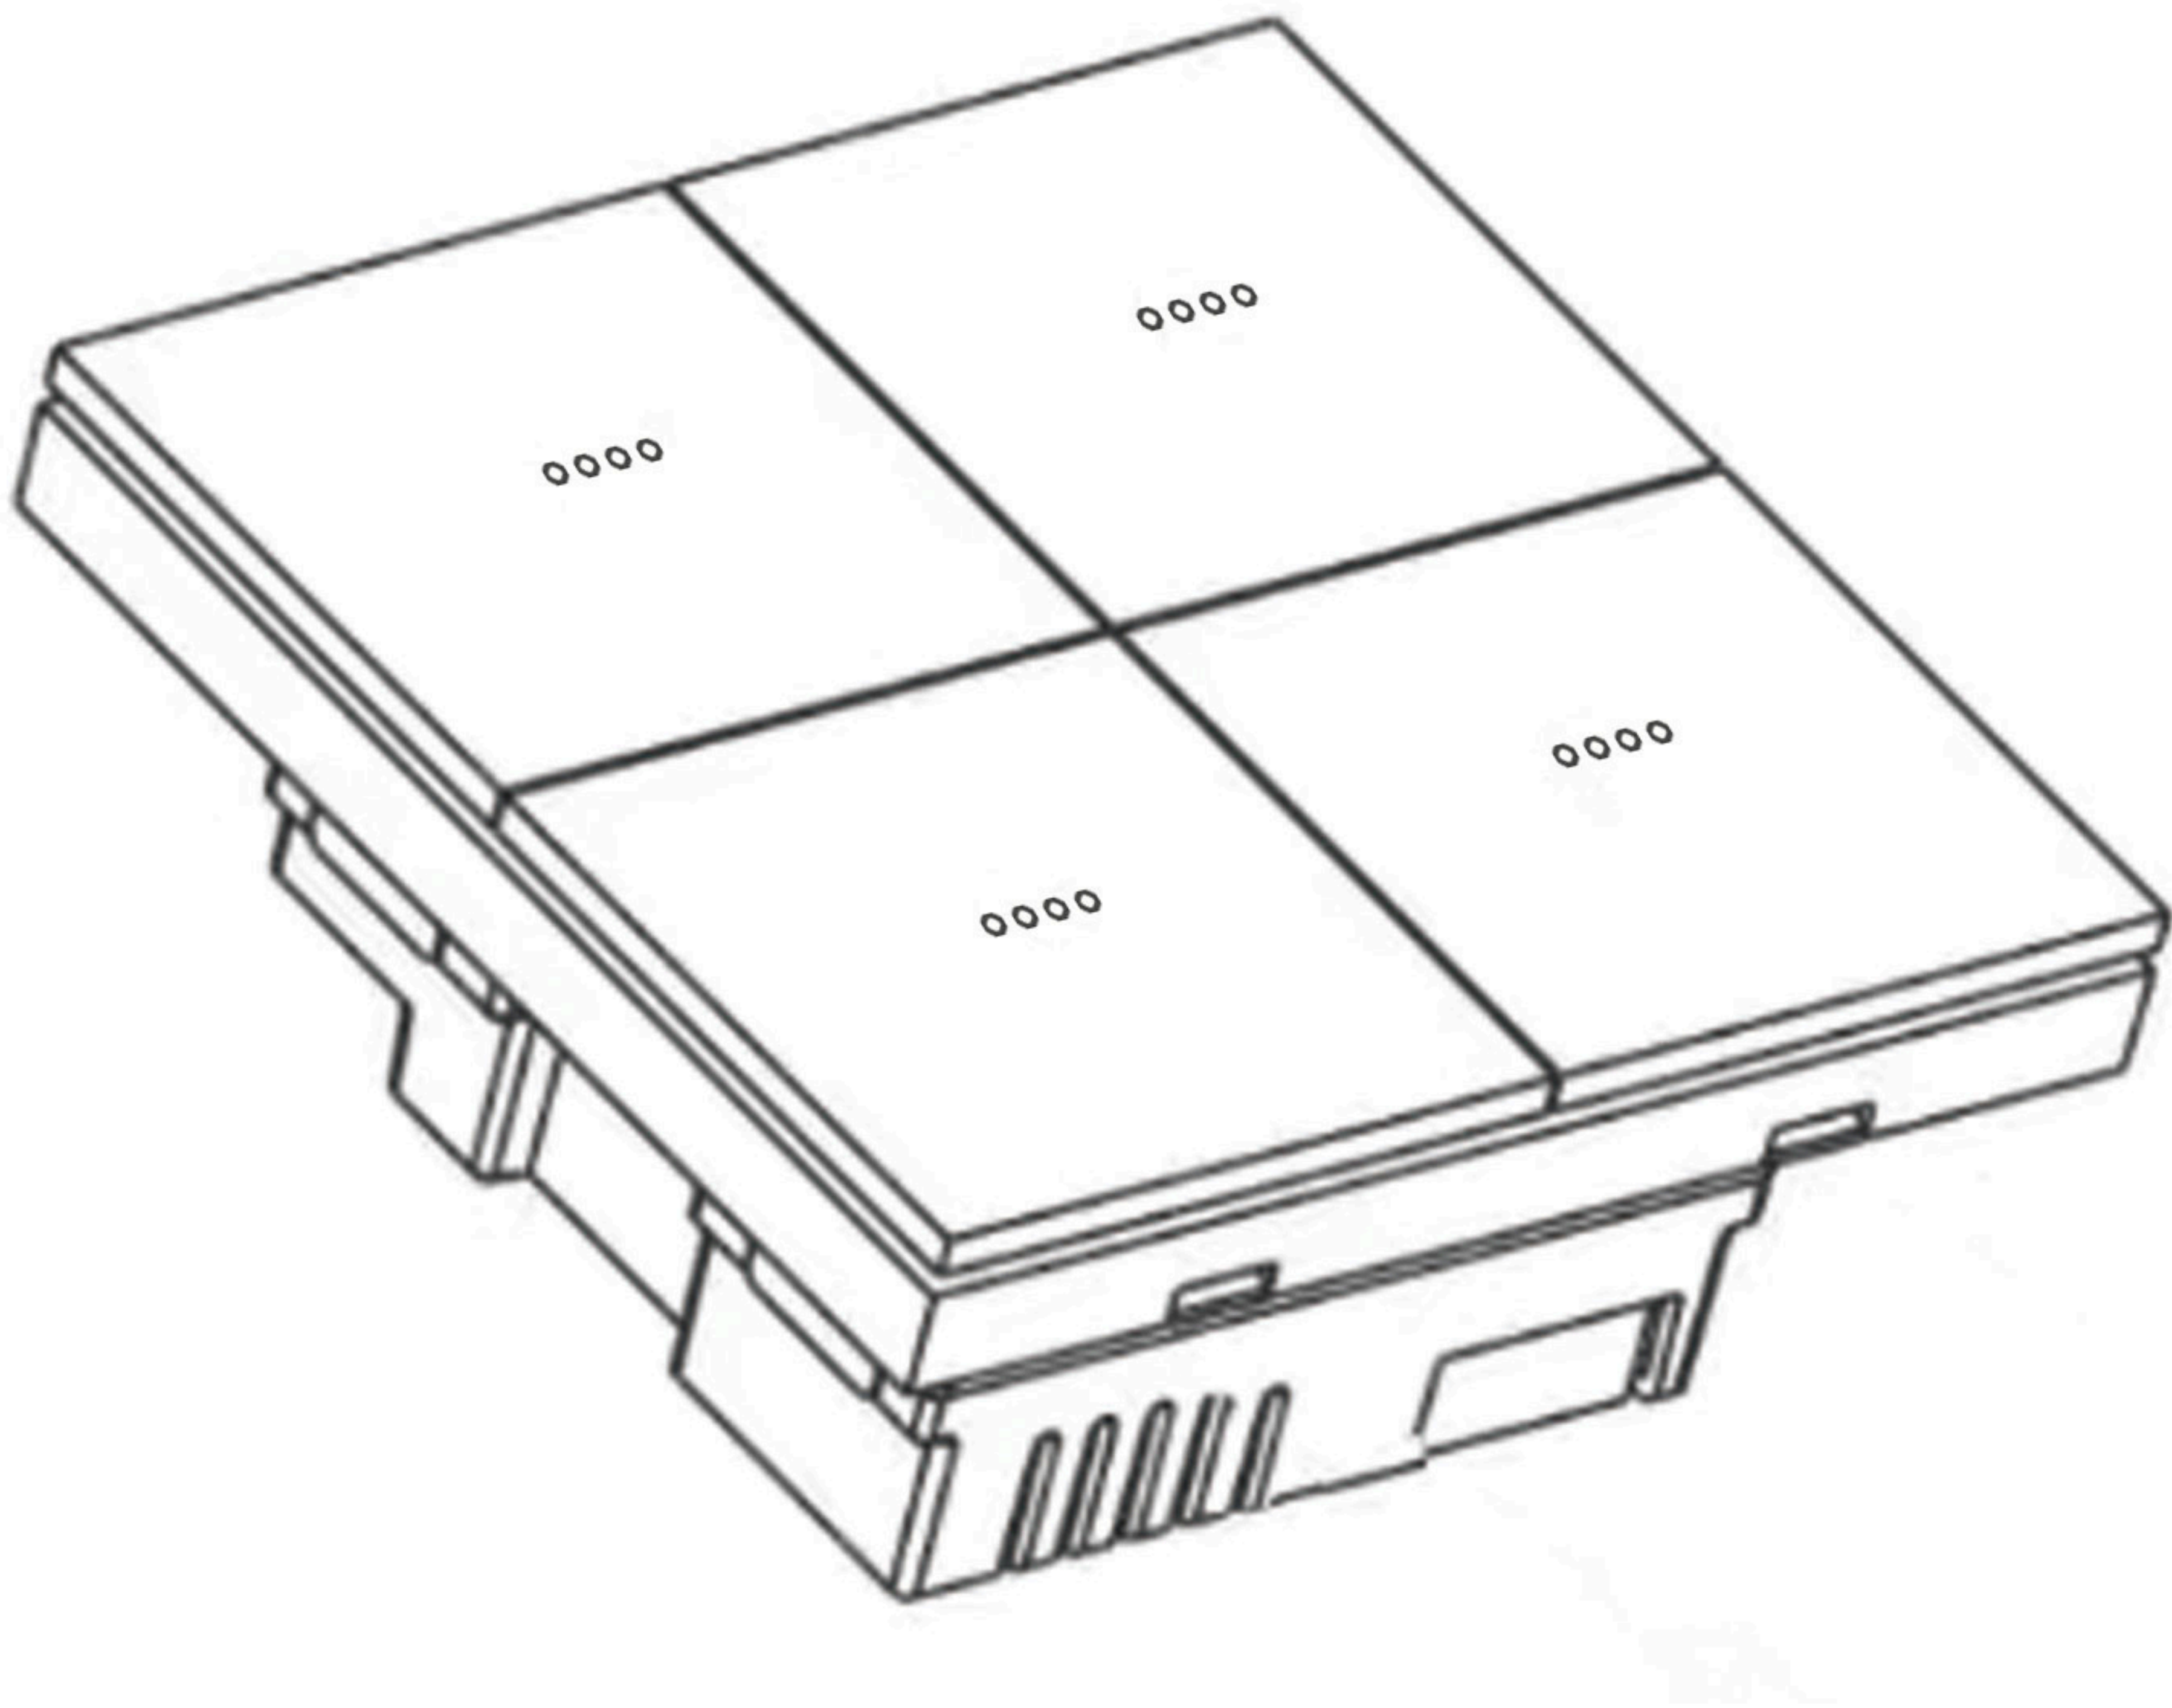


## 2. Product Specifications

Product name		M8 SMART SWITCH (Zigbee)
Product Size		86X86X35mm
Frontplate material		Anti-glare glass
Rated voltage		100-240VAC 50/60Hz μ
Rated Power	L&N	Incandescent lamp 500W/gang
		Fluorescent lamp 200W/gang
		LED lamp 200W/gang
Wireless Type		Zigbee 3.0
Standard		IEEE 802.15.4/IEC 60669-2-1
Power meter		No
Working environment		Temperature: -5℃~50℃ Humidity: 5%~95% RH non-condensing




### 3. Installation instructions and precautions

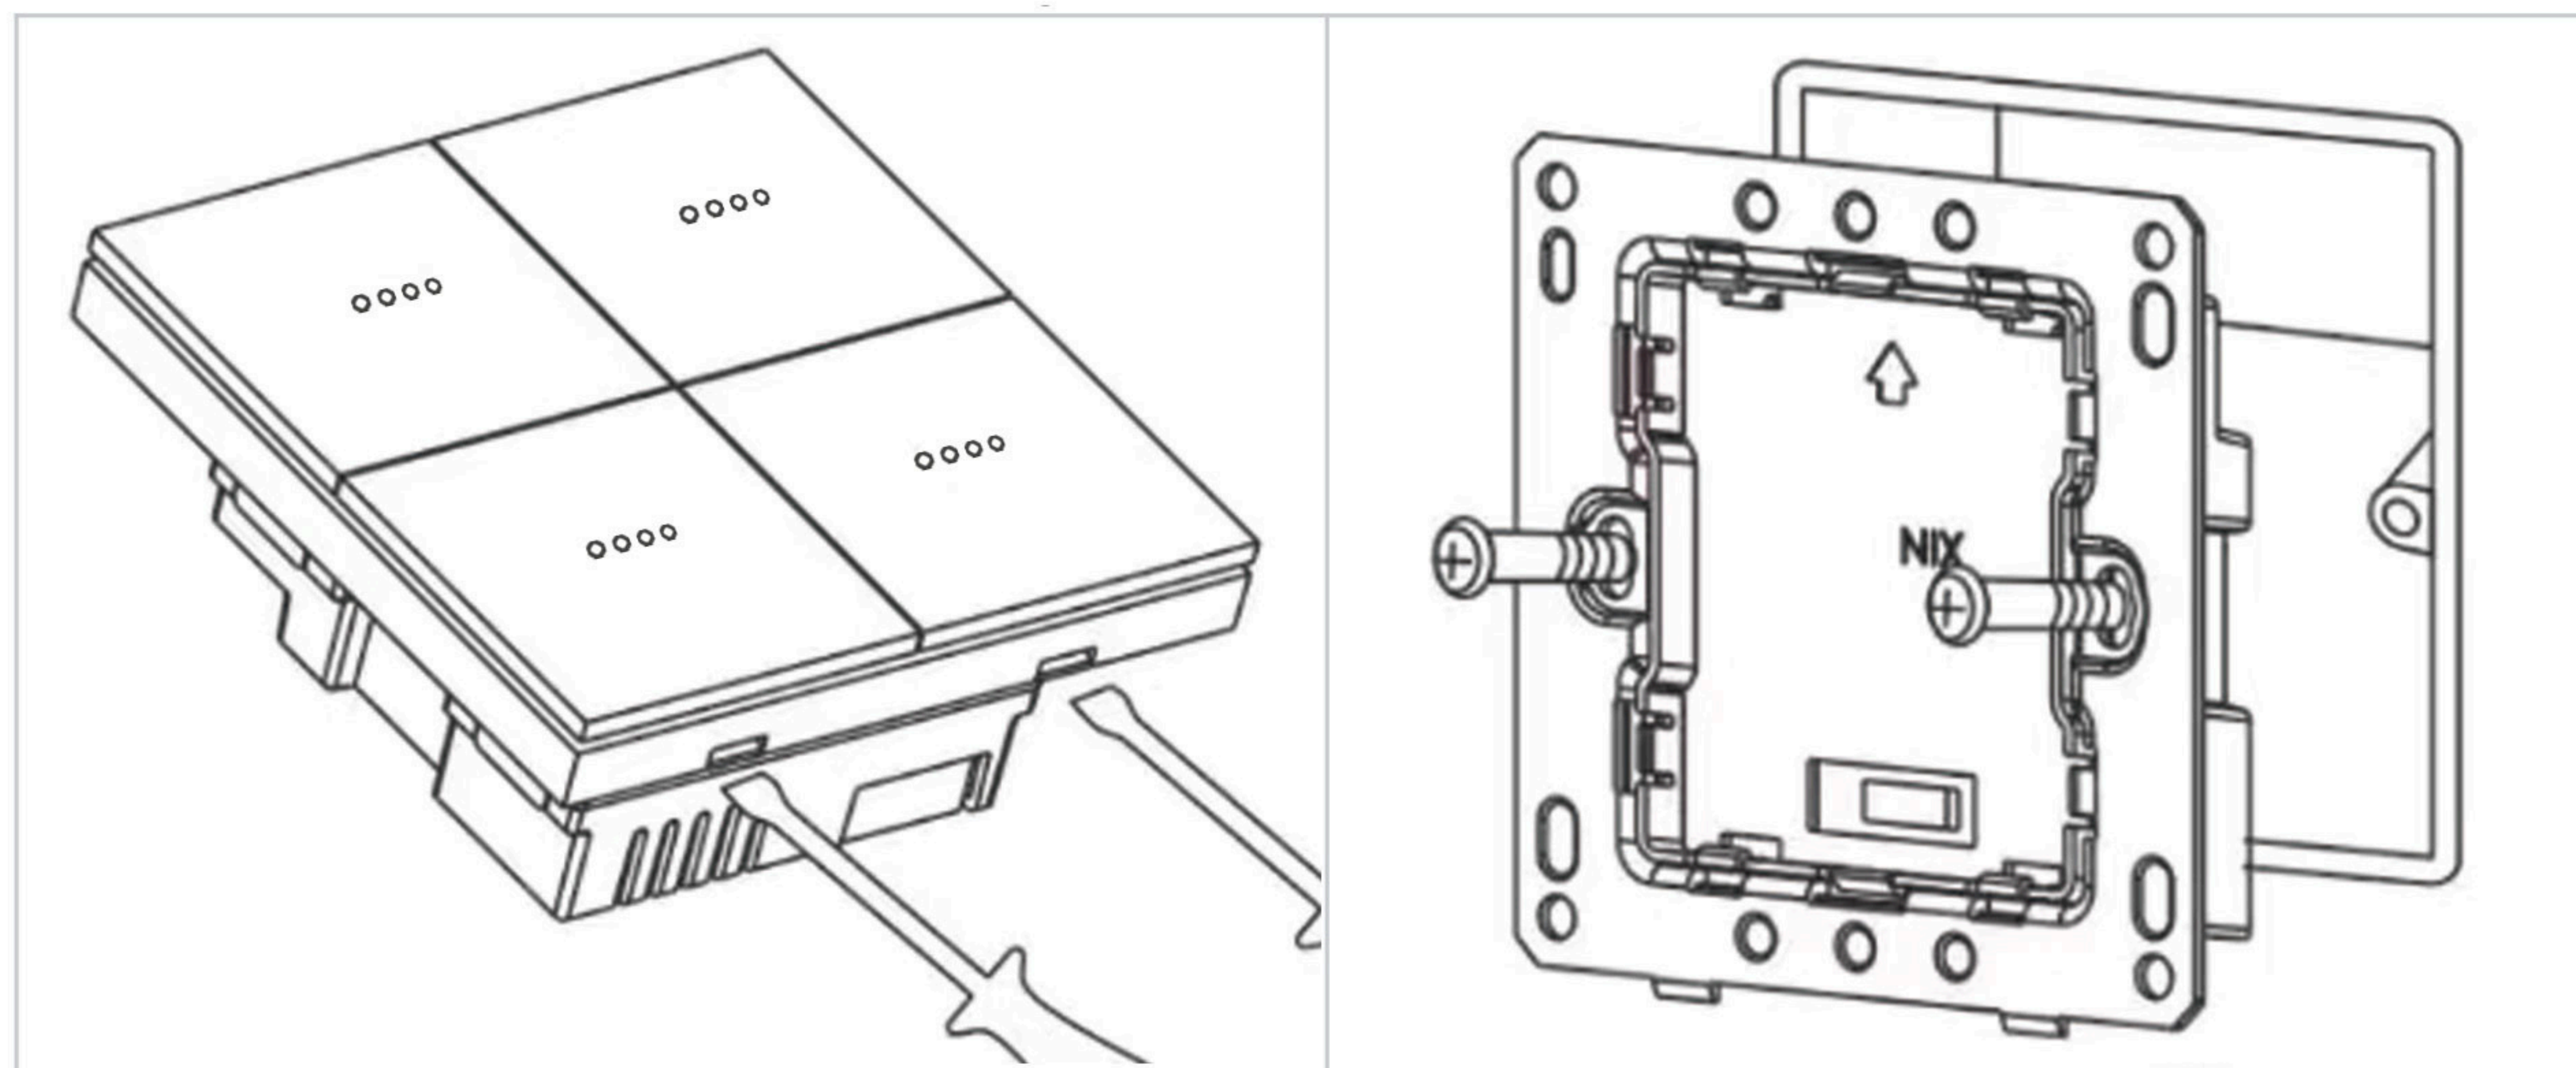



① Use a screwdriver to pry the panel upwards;

② connect the wires;  
install the base to the wall cassette with screws;

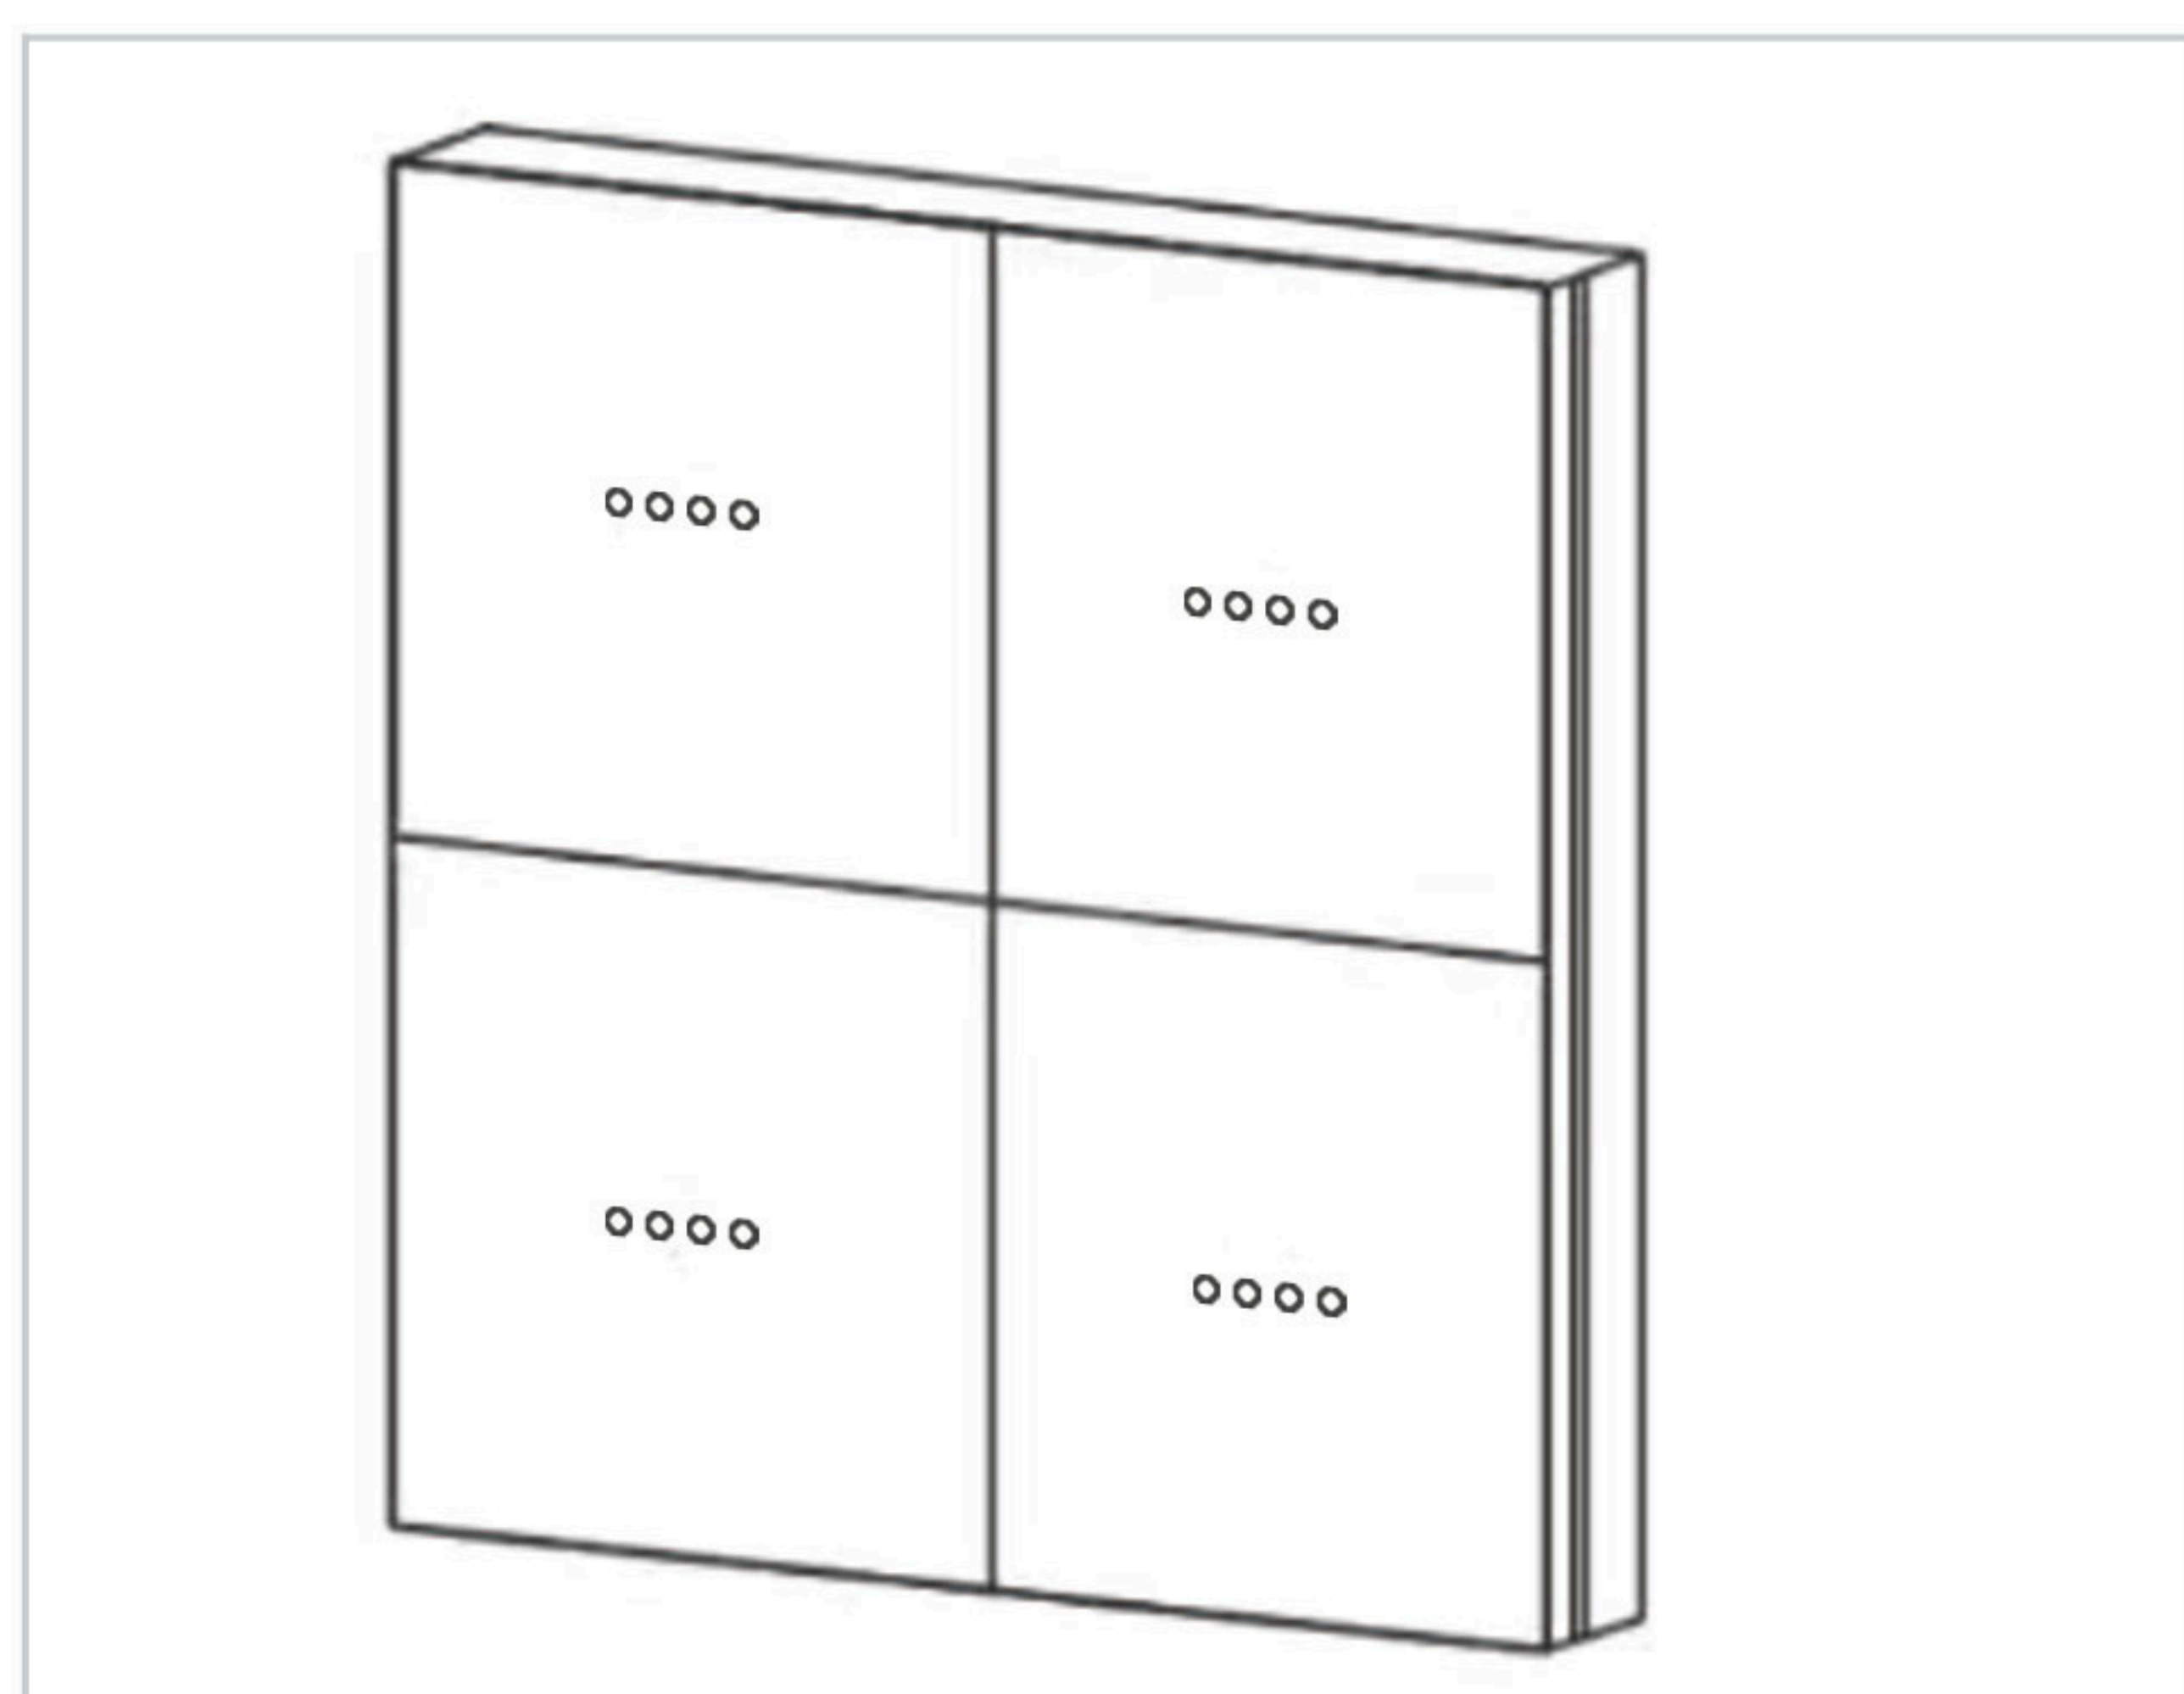

③ Fasten the switch panel to the base.

### 4. Wiring diagram

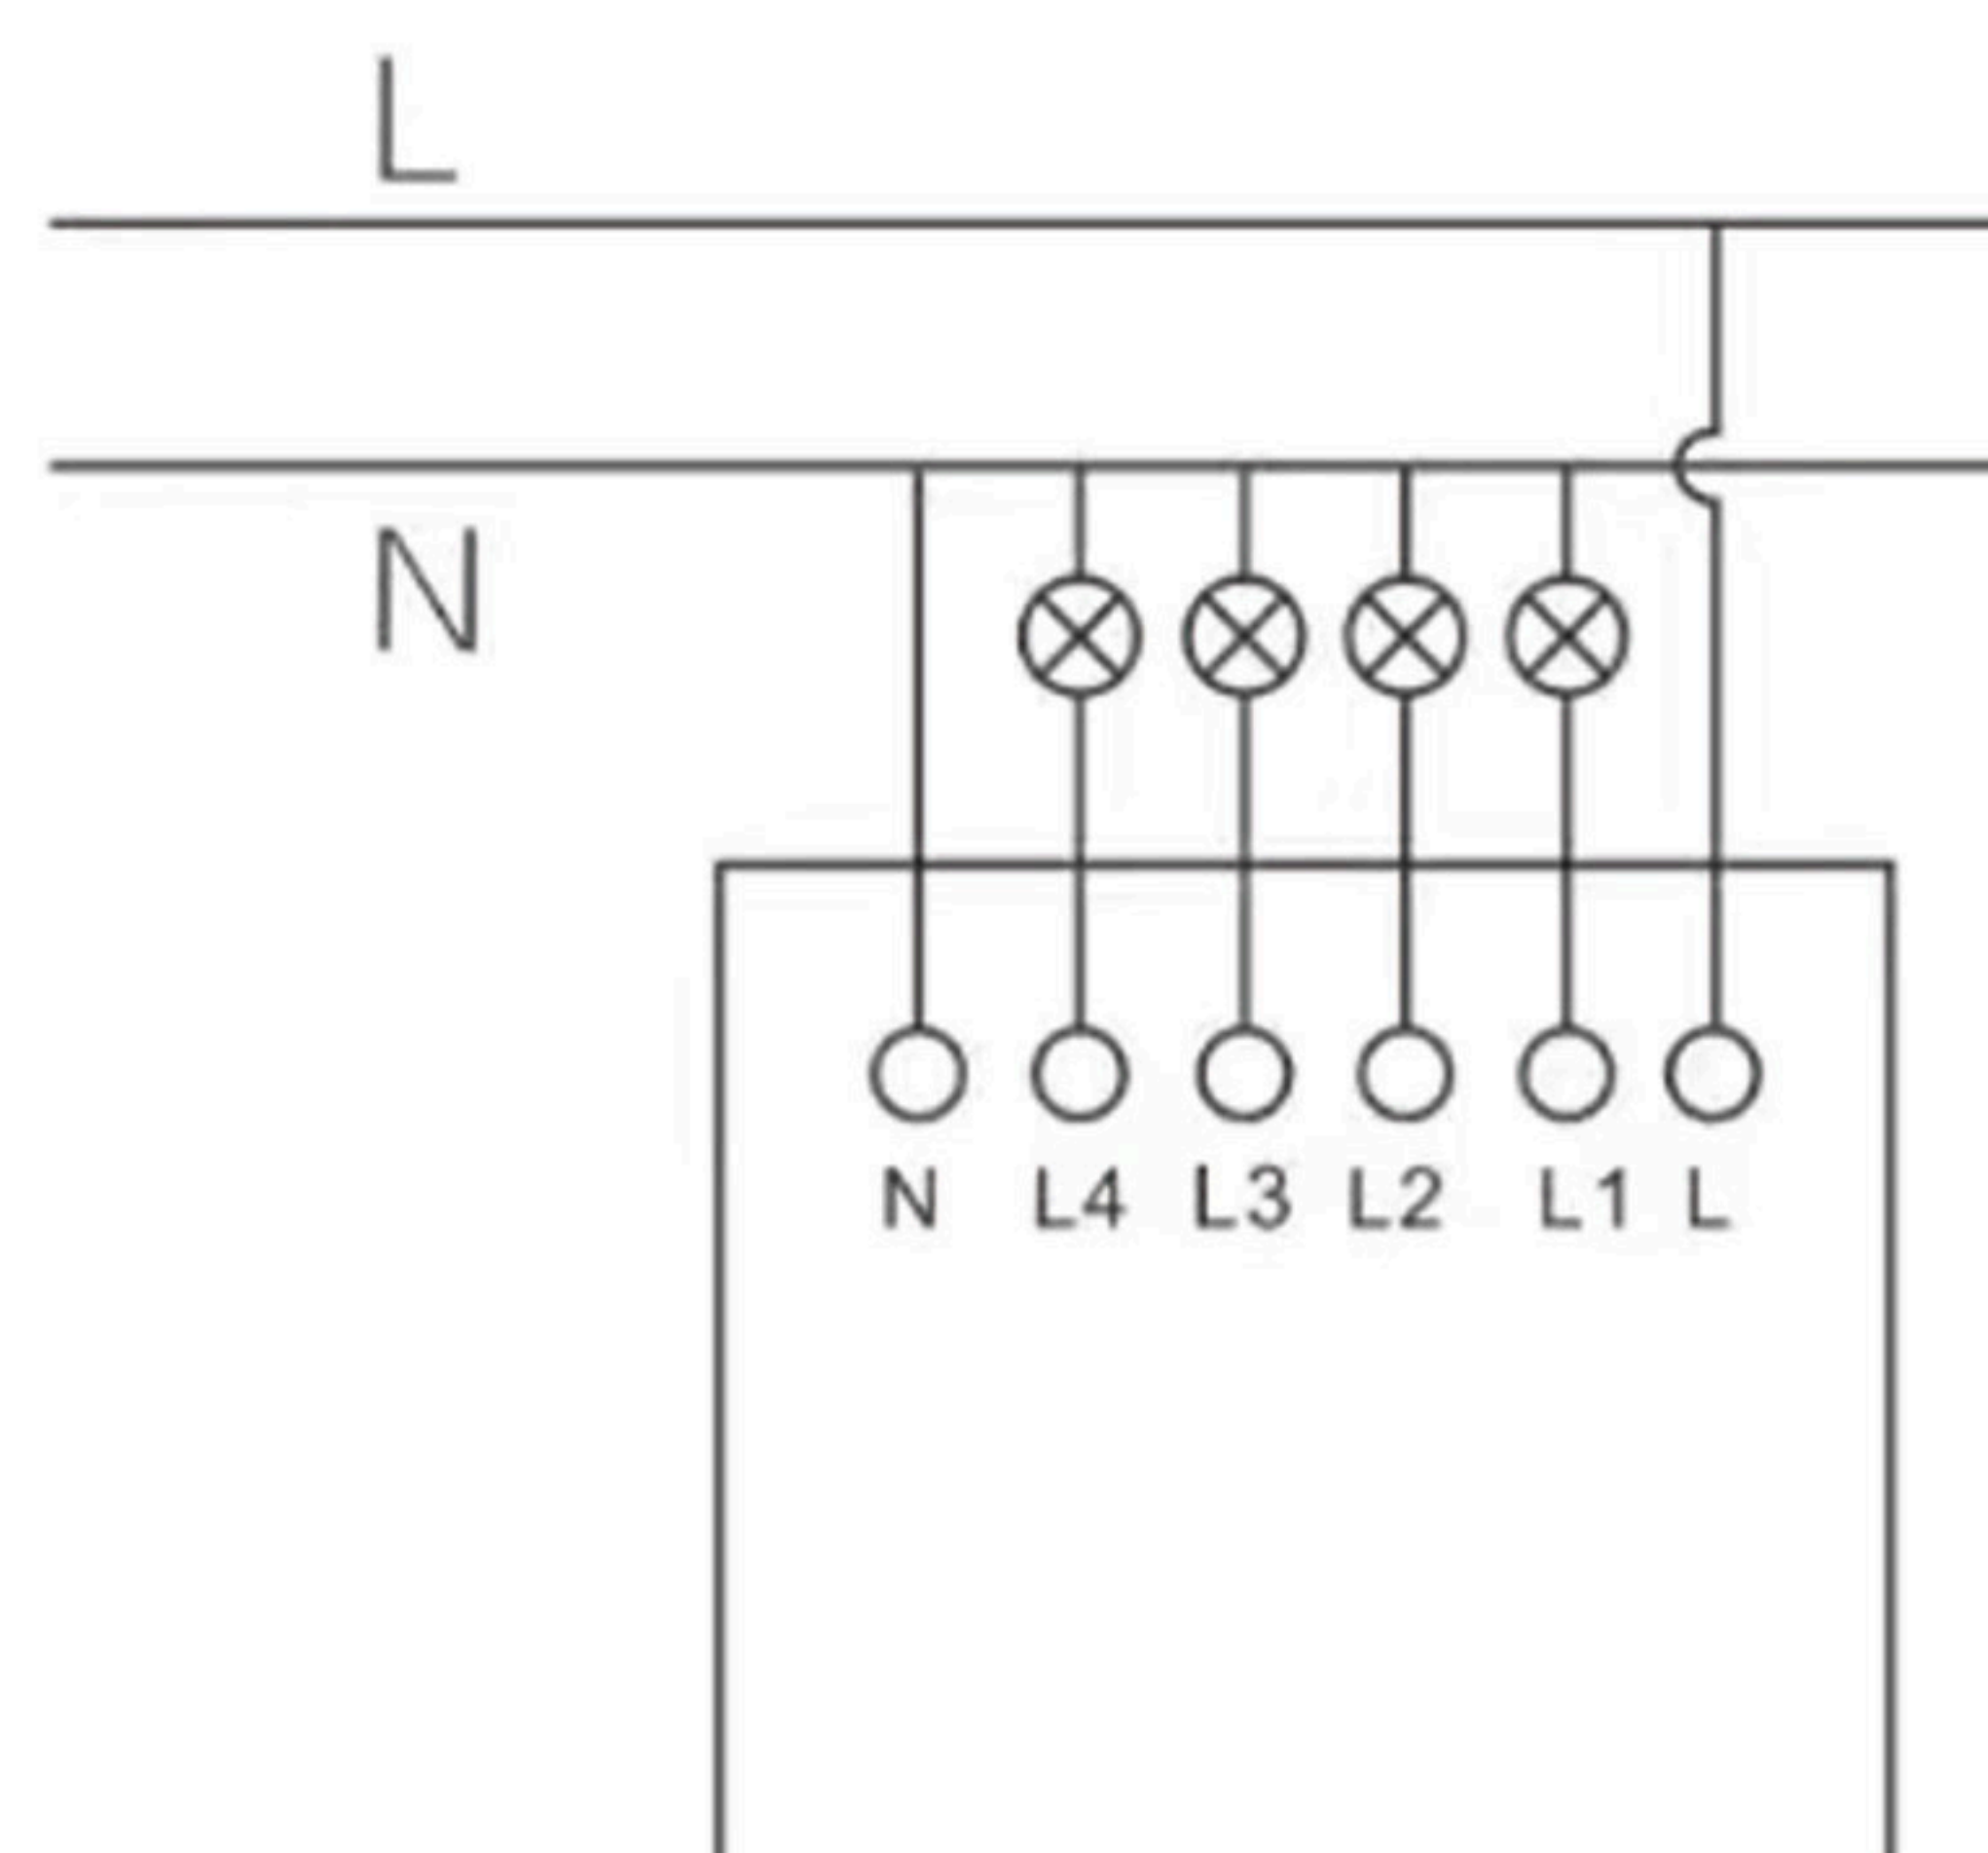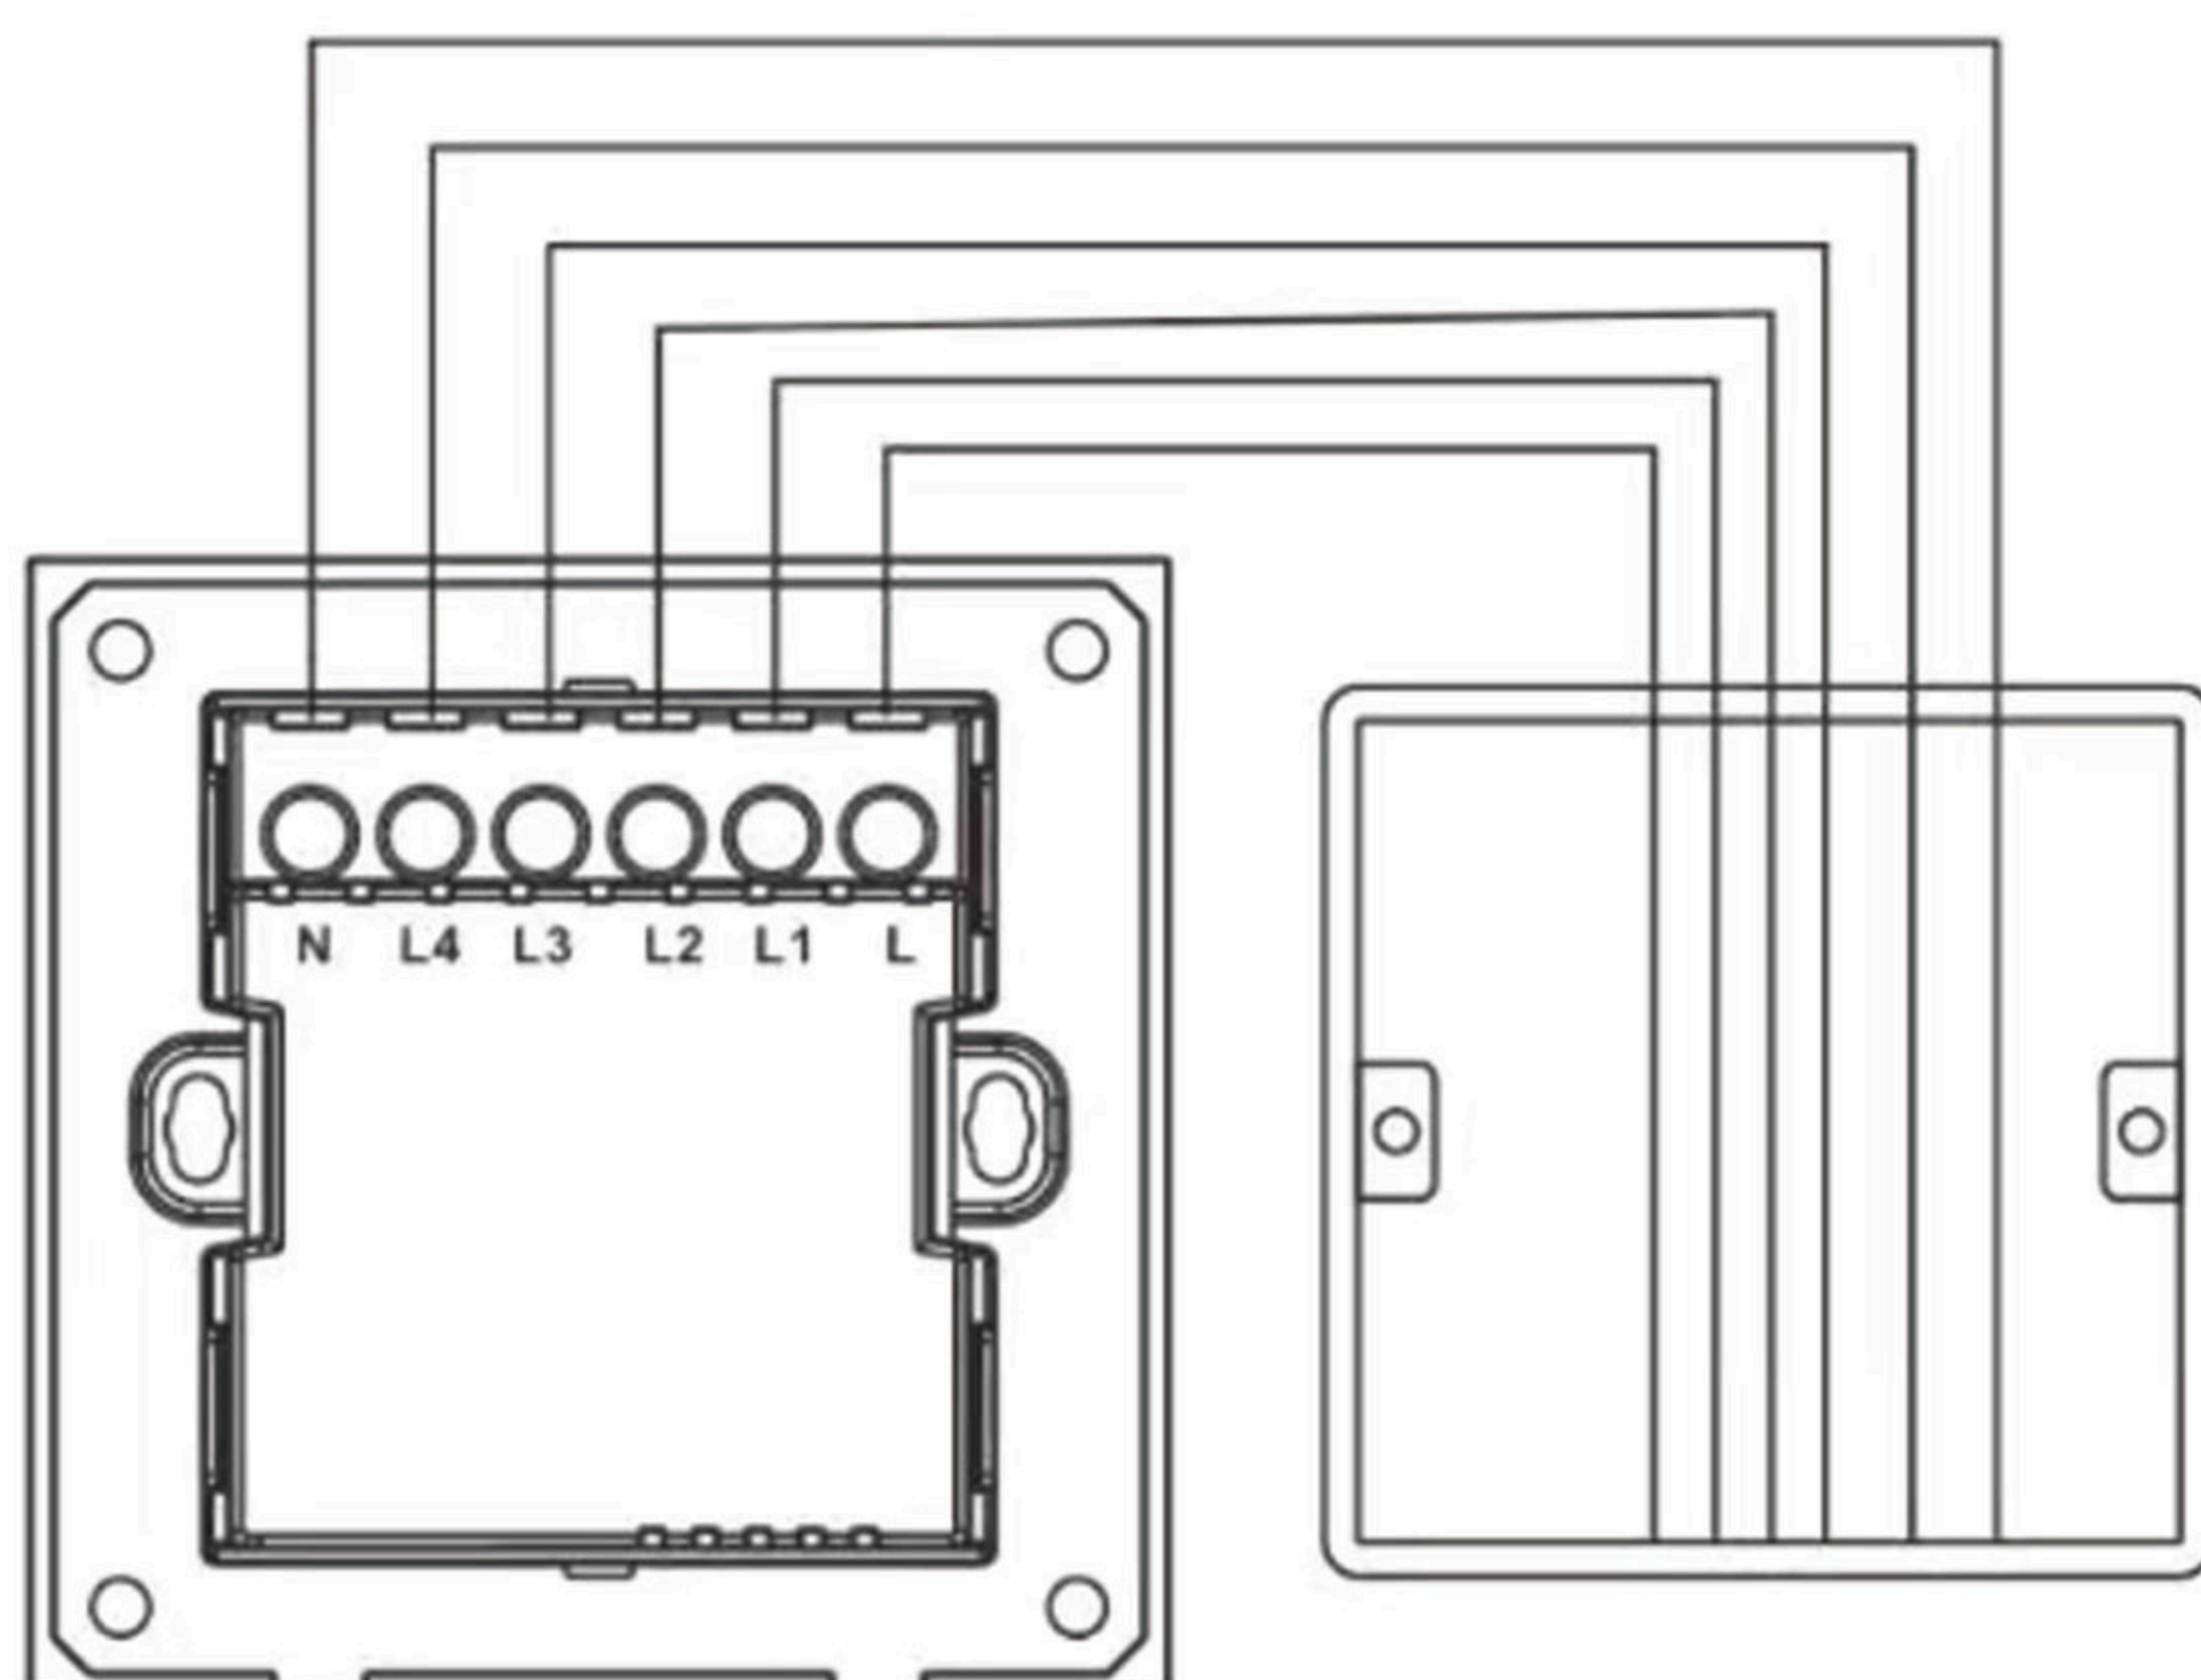




**Precautions:**

1. In order to ensure the correct use of this product, the smart switch must be installed or disassembled by professional electricians;
2. Make sure that the main power switch is turned off before installing or removing the smart switch! Live operation is strictly prohibited;
3. This product should be kept away from fire and water sources during installation and use, and cannot be used in a humid environment.

## 5. Network access settings

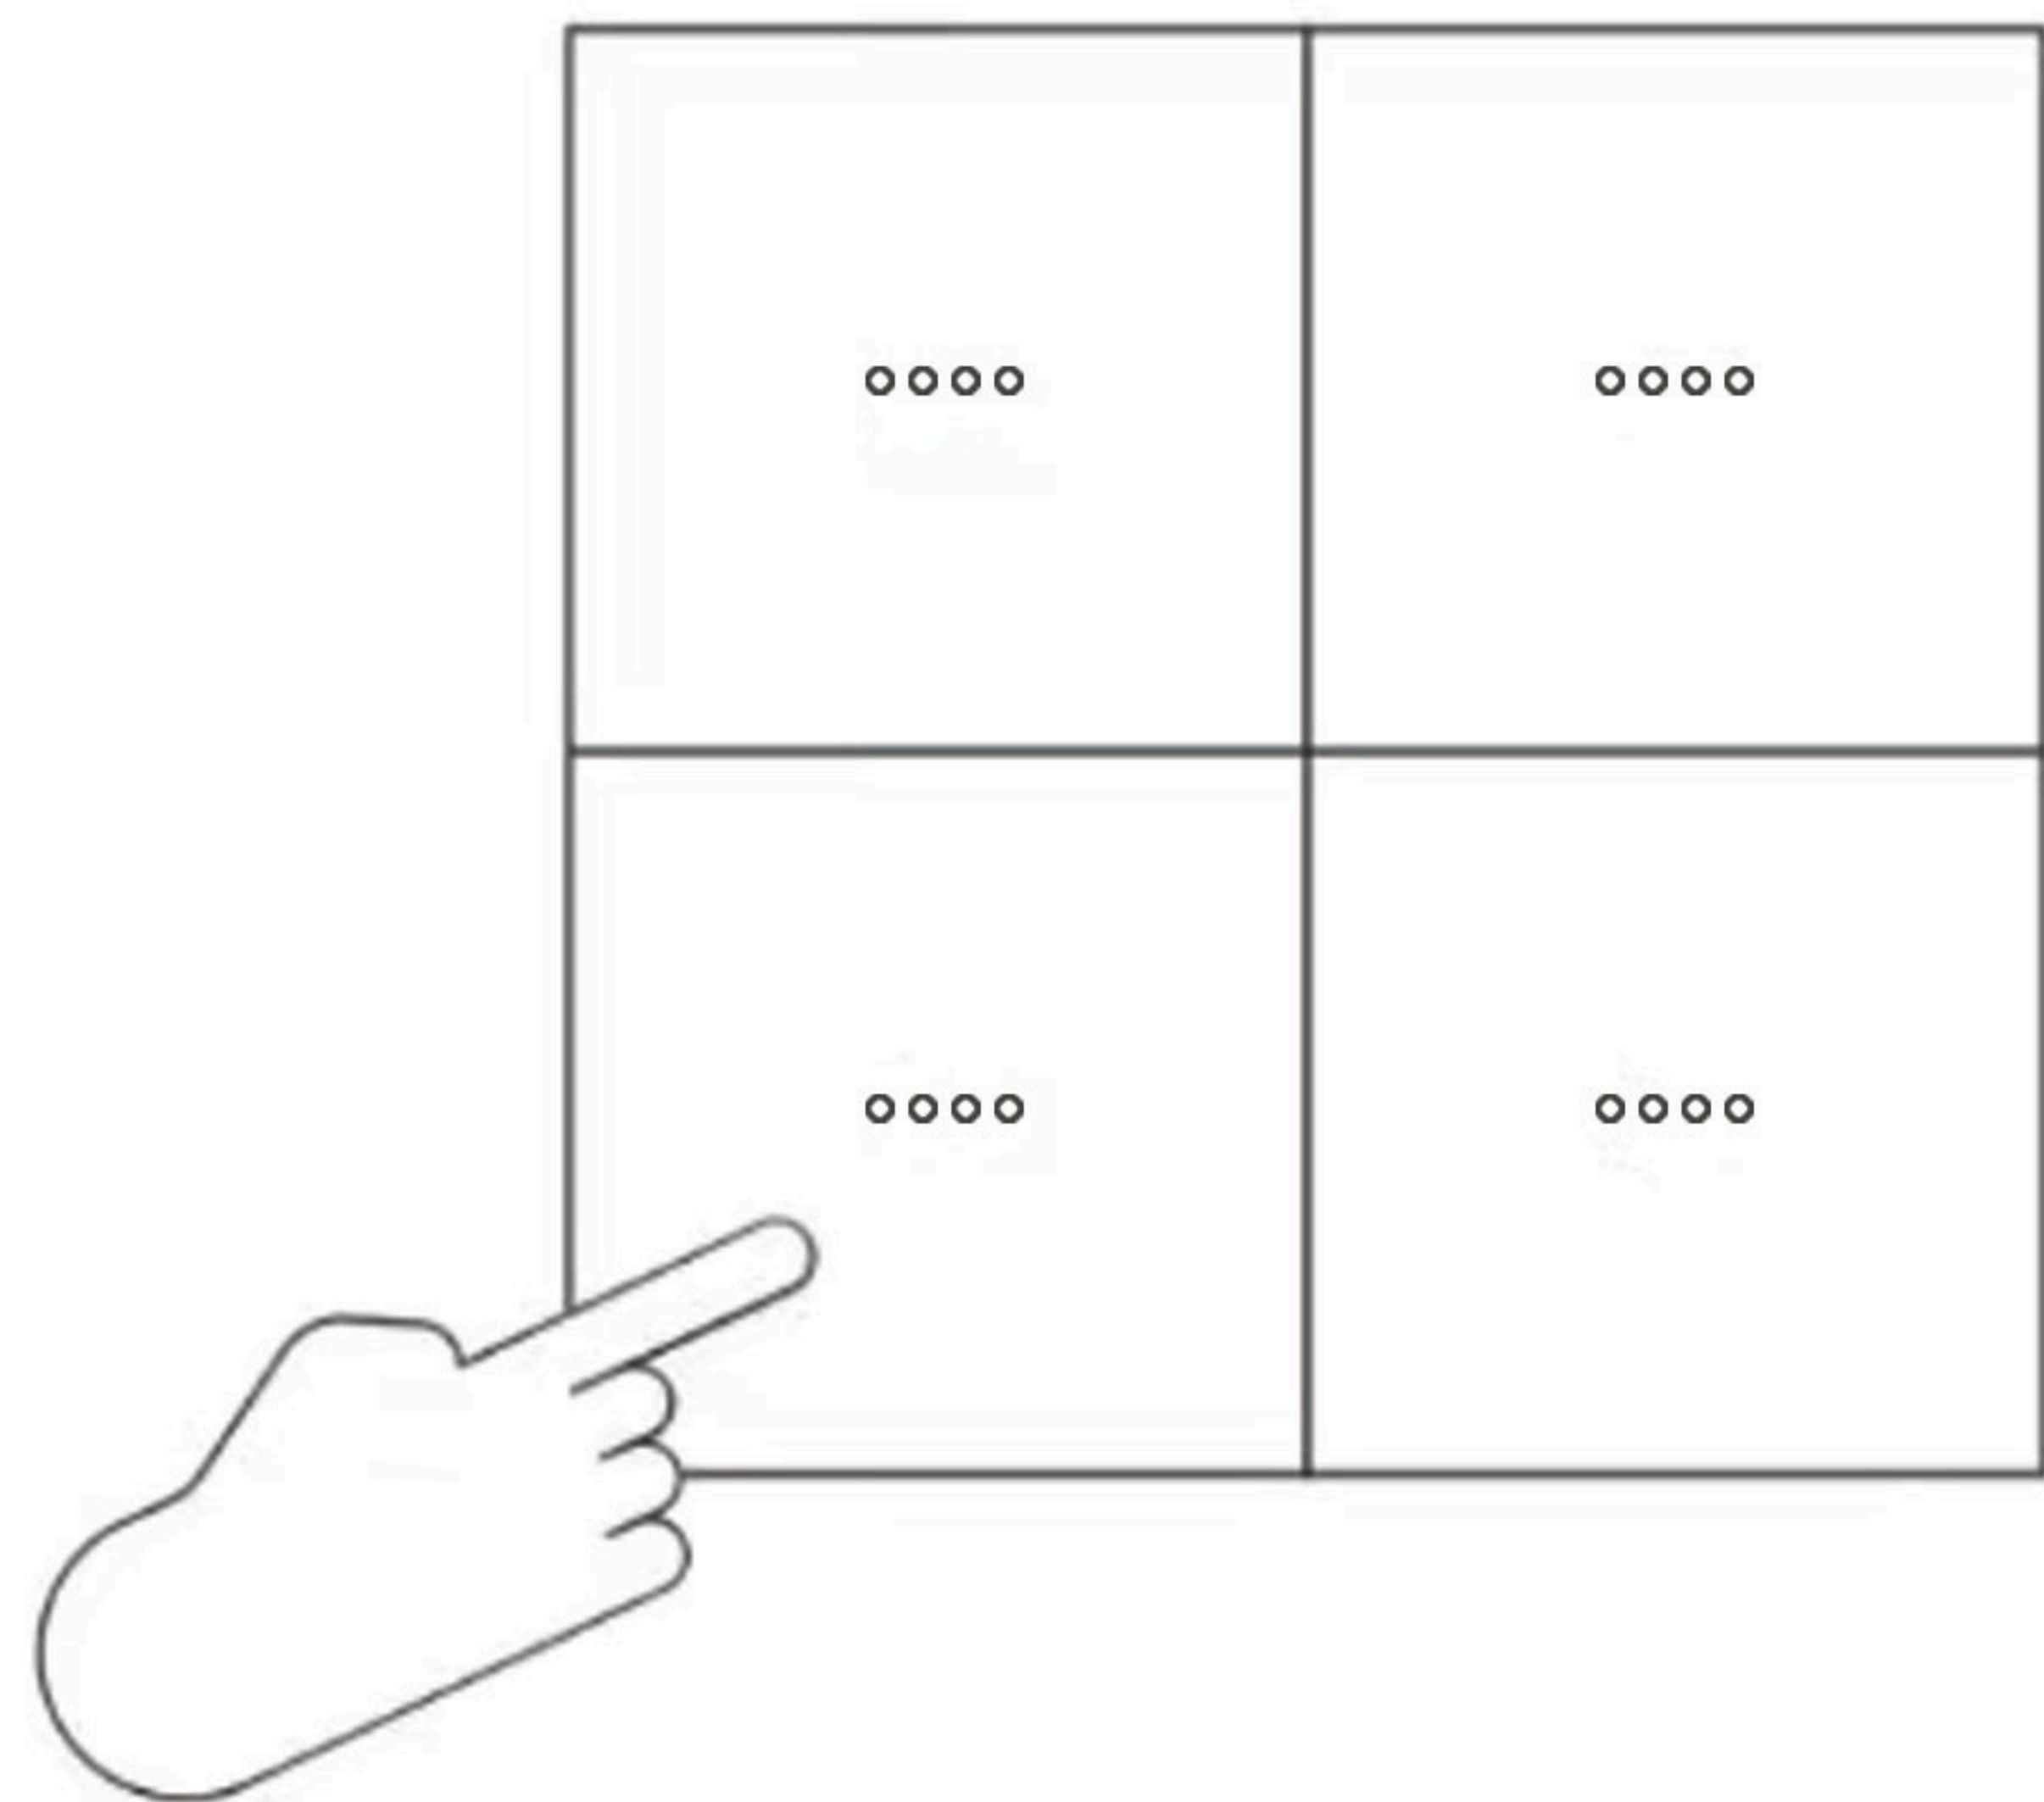

## TUYA APP

1. Scan the above QR code, install the "TUYA" APP, or download it from the Apple APP or Google Play, and register and log in to the APP for new users;
2. If it is a Zigbee switch, you need to add a Zigbee gateway first, and configure the network successfully;
3. The APP enters the sub-device distribution network guidance interface;
4. Click the "+" in the upper right corner of the APP to add a sub-device;
5. Press and hold the touch button on the panel for more than 5 seconds, the blue light flashes quickly, and the switch enters the network distribution mode;
6. Click the Next button, and it will prompt "Device networking is successful", the blue light goes out, and the network configuration is successful.
7. After the smart switch is added to the smart gateway (successfully connected to the network), press and hold the touch button for more than 5 seconds, the blue light will flash quickly, remove the switch from the smart gateway, and the switch will automatically enter the network distribution mode, please operate with caution!